

BELZONA ABRASION RESISTANT LINING FOR DEBARKER

CUSTOMER

Paper Mill, Poland

APPLICATION DATE

June 2016

APPLICATION SITUATION

Rotating debarker drum

PROBLEM

The steel protection plates were wearing away due to severe abrasion. They required a solution to prolong the life of the equipment. If the problem was not resolved during the planned maintenance period, then the customer risked a unscheduled stoppage to the plant and costly downtime.

PRODUCTS

Belzona 1321 (Ceramic S-Metal)

Belzona 1811 (Ceramic Carbide)

SUBSTRATE

Steel

APPLICATION METHOD


The application was carried out in accordance with Belzona System Leaflet SHM-13. After grit blasting the substrate, Belzona 1321 was applied with reinforcement tape before being overlaid with Belzona 1811 at a thickness of 8 mm. Cure time was enhanced by heating the application for 12 hours. The work was performed by 8 technicians, over 6 days, in two shifts.

BELZONA FACTS

As an existing customer, for whom the Polish Distributor had completed a number of smaller repairs and maintenance jobs, the mill contacted the Belzona Distributor for advice on the problem. Crucially, they had carried out a debarker application in 2014, which was almost identical. This had been a big success and they were able to show the client photos and details of the past case study. The volume of product used included 5000kg of Belzona 1811 and 360kg of Belzona 1321.

PICTURES

1. Debarkers create a very abrasive environment
2. Surface preparation prior to application
3. Layers of Belzona 1321 and 1811 applied
4. Belzona 1811 lining of debarker

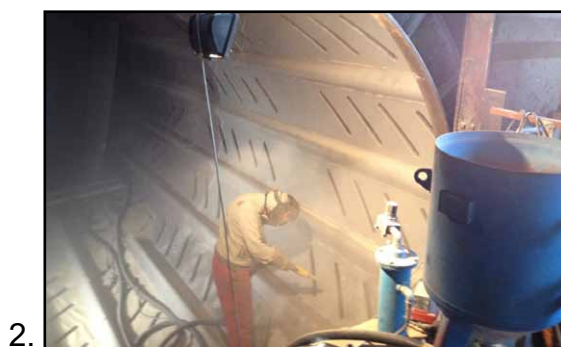

For more examples of *Belzona Know-How In Action*, please visit <http://khia.belzona.com>



ISO 9001:2008
Q 09335
ISO 14001:2004
EMS 509612

Belzona products are
manufactured under an ISO
9000 Registered Quality
Management System.

UK • USA • Canada • Thailand
www.belzona.com


BELZONA
Repair • Protect • Improve