

BELZONA 5871 PROTECTS LOCAL PAPER MILL NCG HEADER PIPING

CUSTOMER

Alabama, United States

APPLICATION DATE

April, 2020

APPLICATION SITUATION

Non-condensable gas header piping of dimensions 16 inch. OD and 100 ft. length and operating at 208 °F was suffering from corrosion under insulation.

PROBLEM

Some thin wall and through-wall defects (live leaks) were found on weld joints upon removal of the existing insulation.

PRODUCTS

Belzona 1511 (Super HT-Metal)

Belzona 5871

SUBSTRATE

Carbon Steel

APPLICATION METHOD

Wall thickness readings were taken prior to any work being completed. Belzona 1511 was used to rebuild thin wall defective areas prior to the application of Belzona 5871. Due to non-sparking requirements on-site, the substrate was prepared using MBX bristle blaster and wire brushing.

BELZONA FACTS

As this piping was to be insulated, the customer was provided with an "all in one" solution (insulation and corrosion resistant barrier). This allowed the customer to use one contractor rather than multiple. Due to the location of the pipe, cool-to-touch properties were not relevant. Nevertheless, the surface temperature was significantly reduced. Overall, Belzona 5871 was a cost-saving solution compared to traditional insulation methods. Belzona 5871 should be able to provide long term corrosion protection and thermal insulation, all in one application!

PICTURES


1. Corroded pipe condition after insulation removal
2. Surface preparation
3. Temperature reduction on the pipe after 5871 application
4. Insulated piping



1.



2.

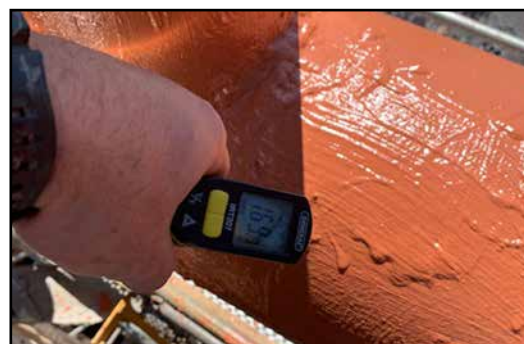

3.



4.

For more examples of *Belzona Know-How In Action*, please visit <http://khia.belzona.com>

ISO 9001:2008
Q 09335
ISO 14001:2004
EMS 509612

Belzona products are
manufactured under an ISO
9000 Registered Quality
Management System.

www.belzona.com

Copyright © Belzona International Limited 2020


BELZONA
Repair • Protect • Improve