

BELZONA HIGH TEMPERATURE LINING FOR NEW AUTOCLAVE

CUSTOMER

Vessel Fabricator, Flums, Switzerland

APPLICATION DATE

October, 2014

APPLICATION SITUATION

New carbon steel autoclave required corrosion protection.

PROBLEM

Operating conditions of the new autoclave will be immersion temperatures up to 110°C (230°F) and corrosive media including ethanol, methyl methacrylate and ETMA.

PRODUCTS

Belzona 1593

SUBSTRATE

Carbon Steel

APPLICATION METHOD

The application was carried out in accordance with Belzona Know-How System Leaflet TCC-5. After grit blasting to SA 2.5 a two-coat system of Belzona 1593 was hand applied to an area of 45m² (484 ft²).

BELZONA FACTS

The Belzona system offers excellent protection against corrosion at high temperatures. Rubbery domains have been incorporated into the polymer matrix to inhibit crack propagation and ensure longevity of the Belzona lining during thermal cycling.

PICTURES


1. Outside view of autoclave
2. Autoclave ready for grit blasting
3. Lining application in action



1.



2.

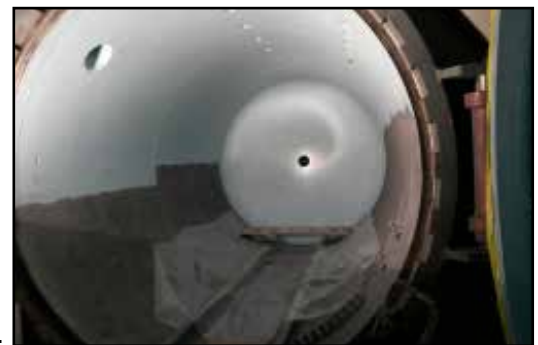

3.

For more examples of *Belzona Know-How In Action*, please visit <http://khia.belzona.com>

ISO 9001:2008
Q 09335
ISO 14001:2004
EMS 509612

Belzona products are
manufactured under an ISO
9000 Registered Quality
Management System.

www.belzona.com


BELZONA[®]
Repair • Protect • Improve