

BELZONA® 1811 PROTECTS OUTPUT SCROLL

ID: 222


Industry: *Sugar*
Application: *SHM-Solids Handling Machinery*

Substrate: *Carbon steel*
Products: ** Belzona® 1811 (Ceramic Carbide) ,*

Customer Location: *Sugar factory in the United Kingdom*
Application Date: *1999*

Problem

Extensive abrasion, up to 7.5mm (30 mils), of the existing glass flake coating and the 25mm (1 inch) thick tubular shaft.

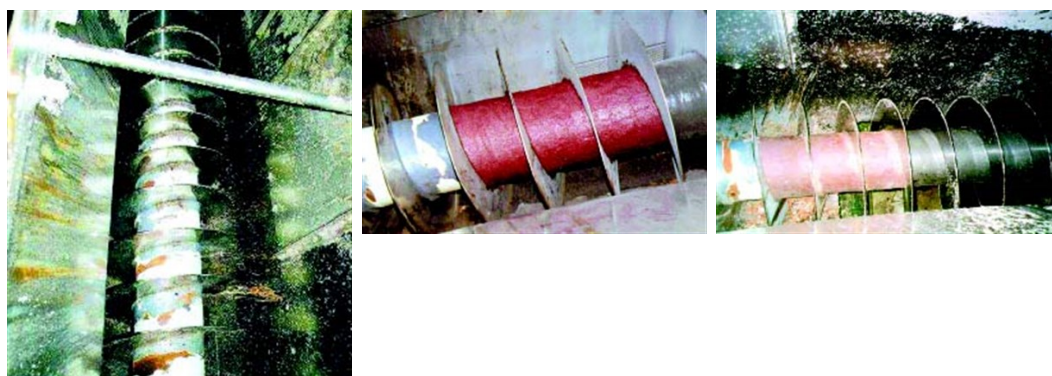

Photograph Descriptions

- * General view of the equipment ,
- * Application completed with Belzona® 1811 ,
- * View of equipment following a campaign in service ,

Application Situation

The cossette scroll located at the diffuser output.

Application Method

The application was carried out in accordance with Belzona Know-How System Leaflet SHM-14.

Belzona Facts

If abrasive wear had continued, it would have ultimately caused the structural failure of the scroll shaft. By protecting the scroll shaft with a Belzona® abrasion resistant material during the annual outage, only minor sacrificial wear of the product occurred, thereby leaving the substrate undamaged. Unlike an "imitator's" system, the Belzona protection was found upon inspection at the next outage to be unaffected.

For more examples of Belzona Know - How In Action, please visit <https://khia.belzona.com>

ISO 9001:2015
FS 695214
ISO 14001:2015
EMS 695213

Belzona products are
manufactured under an ISO
9000 Registered Quality
Management System.

www.belzona.com


BELZONA®
Repair • Protect • Improve

For more examples of Belzona Know - How In Action, please visit <https://khia.belzona.com>

ISO 9001:2015
FS 695214
ISO 14001:2015
EMS 695213

Belzona products are
manufactured under an ISO
9000 Registered Quality
Management System.

www.belzona.com

Copyright © Belzona International Limited 2024

