

FRANCIS TURBINE SHAFT PROTECTED WITH BELZONA

ID: 3431


Industry: *Power*
 Application: *MPT-Mechanical Power Transmission*

Customer Location: *Hydroelectric Power Station, France*
 Application Date: *November 2006*

Substrate: *Steel*
 Products: ** Belzona® 1341 (Supermetaglide),*
** Belzona® 2141 (ACR-Fluid Elastomer),*
** Belzona® 2941 (Elastomer SP-Conditioner),*

Problem

Shaft damaged by cavitation and erosion

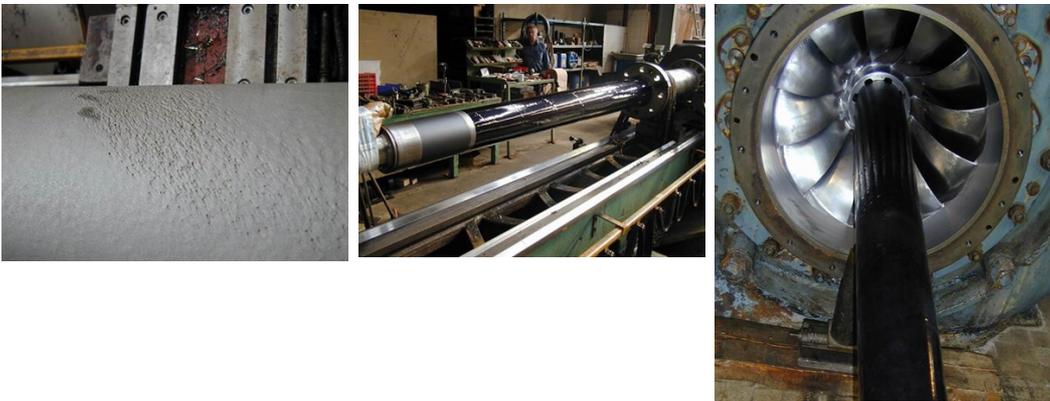

Photograph Descriptions

- * Shaft damaged by cavitation/erosion ,
- * Belzona® 2141 after the application ,
- * Inspection of Belzona® 2141 protection of the turbine shaft after 9 months in service. ,

Application Situation

Main shaft, 160 mm diameter, 1000 rpm.

Application Method

After blasting the surface, Belzona® 1341 was applied in one coat. Belzona® 2941 conditioner was used to tie in the Belzona® 2141 system.

For more examples of Belzona Know - How In Action, please visit <https://khia.belzona.com>

ISO 9001:2015
 FS 695214
 ISO 14001:2015
 EMS 695213

Belzona products are
 manufactured under an ISO
 9000 Registered Quality
 Management System.

www.belzona.com


BELZONA
 Repair • Protect • Improve

Belzona Facts

The application was carried out on the shaft in a lathe and the finish was obtained by using a rubber squeegee. Inspection of the Belzona® 2141 in 2007 and 2010 showed the system still in perfect condition.

For more examples of Belzona Know - How In Action, please visit <https://khia.belzona.com>

ISO 9001:2015
FS 695214
ISO 14001:2015
EMS 695213

Belzona products are
manufactured under an ISO
9000 Registered Quality
Management System.

www.belzona.com

