

BELZONA REPAIRS DAMAGED CONCRETE FLOOR


ID: 5059

Industry: Buildings & Structures
Application: FPA-Floor Problem Areas
Substrate: Concrete
Products: * Belzona 4111 (Magma-Quartz) ,

Customer Location: Textile manufacturer, Rochdale, UK
Application Date: February 2014

Problem

The floor was suffering from heavy wear in localised areas due to the heavy forklift truck traffic present on the site. This had caused damage to numerous areas of the concrete with a loss of depth in some areas of up to 10mm.

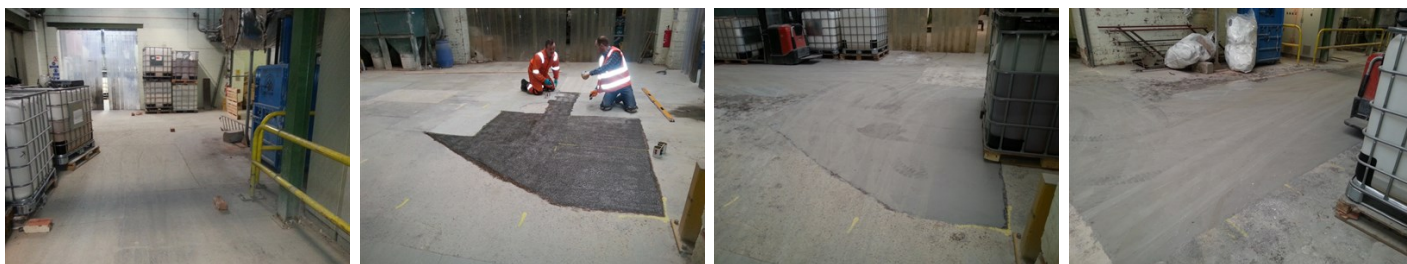

Photograph Descriptions

* Damaged concrete floor Application of Belzona 4111 & 4. Completed repair ,

Application Situation

About 28m² of concrete floor in textile plant exposed to regular forklift truck traffic.

Application Method

Application was carried out in accordance with Belzona Know-How System Leaflet FPA-1. A mechanical plane and cutter were used to remove the concrete substrate in the designated areas down to a minimum depth of 6mm before it was conditioned with Belzona 4911. The surface was then rebuilt with Belzona 4111 finishing flush with the surrounding areas.

Belzona Facts

Belzona was able to carry out the application over the course of a weekend, allowing the facility to be back in service for 6:30am Monday morning. The repair procedure ensured a smooth transition between original floor areas and the repair.

For more examples of Belzona Know - How In Action, please visit <https://khia.belzona.com>

ISO 9001:2015
FS 695214
ISO 14001:2015
EMS 695213

Belzona products are
manufactured under an ISO
9000 Registered Quality
Management System.

www.belzona.com


BELZONA
Repair • Protect • Improve