

# BELZONA REPAIRS DAMAGED CONCRETE FLOOR


ID: 5059

Industry: Buildings & Structures  
Application: FPA-Floor Problem Areas  
Substrate: Concrete  
Products: \* Belzona 4111 (Magma-Quartz) ,

Customer Location: Textile manufacturer, Rochdale, UK  
Application Date: February 2014

## Problem

The floor was suffering from heavy wear in localised areas due to the heavy forklift truck traffic present on the site. This had caused damage to numerous areas of the concrete with a loss of depth in some areas of up to 10mm.

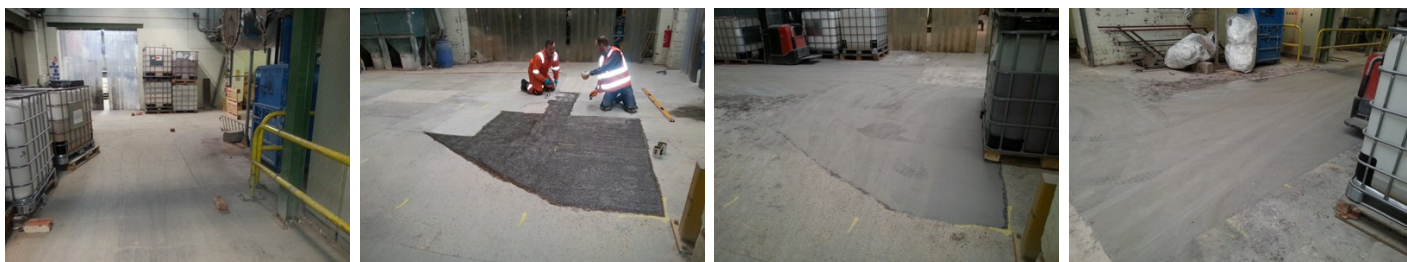

## Photograph Descriptions

\* Damaged concrete floor Application of Belzona 4111 & 4. Completed repair ,

## Application Situation

About 28m<sup>2</sup> of concrete floor in textile plant exposed to regular forklift truck traffic.

## Application Method

Application was carried out in accordance with Belzona Know-How System Leaflet FPA-1. A mechanical plane and cutter were used to remove the concrete substrate in the designated areas down to a minimum depth of 6mm before it was conditioned with Belzona 4911. The surface was then rebuilt with Belzona 4111 finishing flush with the surrounding areas.

## Belzona Facts

Belzona was able to carry out the application over the course of a weekend, allowing the facility to be back in service for 6:30am Monday morning. The repair procedure ensured a smooth transition between original floor areas and the repair.

For more examples of Belzona Know - How In Action, please visit <https://khia.belzona.com>

ISO 9001:2015  
FS 695214  
ISO 14001:2015  
EMS 695213

Belzona products are  
manufactured under an ISO  
9000 Registered Quality  
Management System.

[www.belzona.com](http://www.belzona.com)

  
**BELZONA**  
Repair • Protect • Improve