

BELZONA PROTECTS NEW BEARING WHEEL

ID: 5235


Industry: Power
Application: FBC-Fans, Blowers and Compressors

Customer Location: South Carolina, USA
Application Date: August 2011

Substrate: Cast Iron
Products: * Belzona 5811 (Immersion Grade),

Problem

Erosion from the dust particles in the bag house room cause cavitated pits. Humidity and water exposure caused corrosion of the metal, shortening the work life of the bearing wheel. The unit needs to stay in service for 8 years holding bearings and oil. It is costly to replace or repair.

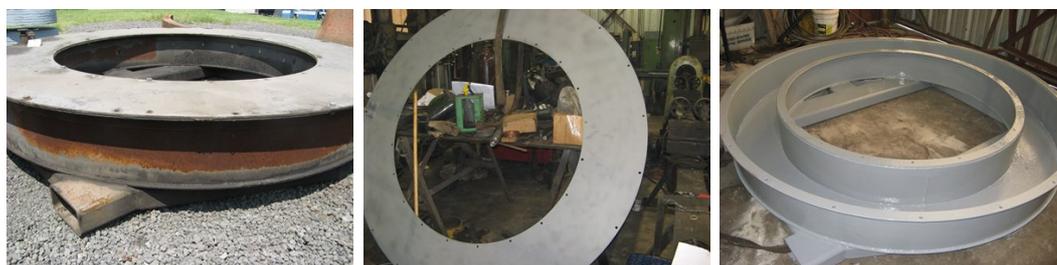

Photograph Descriptions

- * New bag house bearing wheel ,
- * Bearing wheel seat after grit blasting and degreasing ,
- * Bearing wheel seat with 2 coats of Belzona 5811 ,

Application Situation

New bearing wheel that will operate in a bag house dust room exposed to abrasion on the exterior and filled with bearings and hydrocarbon on the interior.

Application Method

The application was carried out in accordance with Belzona Know-How System Leaflet FBC-2 and the IFU for 5811. After grit blasting, cleaning and degreasing, we applied two coats of 5811 in two different colors to help detect pin holes. Material was applied with a roller and brush.

Belzona Facts

Belzona 5811 was selected because of it's rating for hydrocarbons, adhesion and temperature rating. The bag house bearing wheel needs to have a service life of 8 years due to the cost of replacement. Without a protective coating these units required extensive

For more examples of Belzona Know - How In Action, please visit <https://khia.belzona.com>

ISO 9001:2015
FS 695214
ISO 14001:2015
EMS 695213

Belzona products are
manufactured under an ISO
9000 Registered Quality
Management System.

www.belzona.com



service for corrosion and oxidation control.

For more examples of Belzona Know - How In Action, please visit <https://khia.belzona.com>

ISO 9001:2015
FS 695214
ISO 14001:2015
EMS 695213

Belzona products are
manufactured under an ISO
9000 Registered Quality
Management System.

www.belzona.com

