

REPAIRING COOLING TOWER SEAMS WITH BELZONA


ID: 5896

Industry: Buildings & Structures
Application: HEX-Heat Exchangers
Substrate: Stainless Steel.
Products: * Belzona 2911 (Elastomer QD Conditioner) ,
* Belzona 9341 (Reinforcement Tape) ,
* Belzona 2131 (D & A Fluid Elastomer) ,

Customer Location: Hospital, North Carolina, USA
Application Date: August 2015

Problem

Towers were leaking around seams and protrusions.

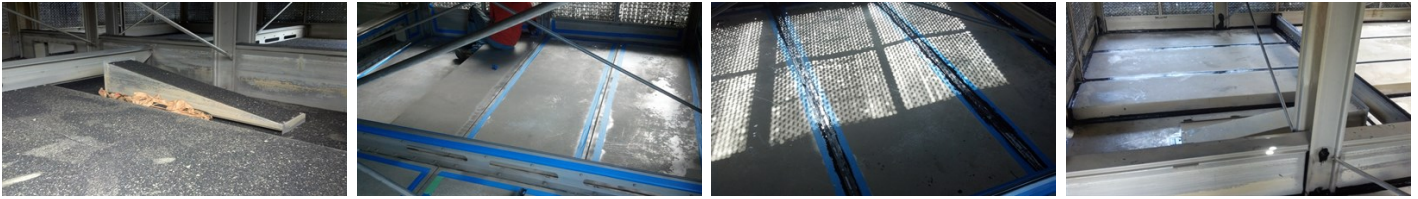

Photograph Descriptions

- * Blasting completed, prior to media removal ,
- * Taping and conditioning all seams/protrusions ,
- * First coat of Belzona 2131, embedding Belzona 9341 ,
- * Completed application to towers ,

Application Situation

Roof-mounted cooling towers (2 cells joined into 1 tower).

Application Method

The application was carried out in accordance with Belzona Know-How System Leaflets HEX-6, HEX-13, TCC-12, FPA-6 and a modified version of FPA-7. The substrate was prepared via media blast with Black Beauty, cleaned, taped, and then conditioned with Belzona 2911. Once cured for ½ hour, a two-coat reinforced system of Belzona 2131 was utilized to create a polymer overlay over all assembly seams/joint. Bolt holes and other protrusions were top-dressed with a coating of Belzona 2131.

Belzona Facts

Belzona provided a cost effective solution to the leaking tower, allowing for a return to service within 4 days of the beginning of application.

For more examples of Belzona Know - How In Action, please visit <https://khia.belzona.com>

ISO 9001:2015
FS 695214
ISO 14001:2015
EMS 695213

Belzona products are
manufactured under an ISO
9000 Registered Quality
Management System.

www.belzona.com


BELZONA[®]
Repair • Protect • Improve