

BELZONA EXTENDS THE LIFE OF THIS SCREW PRESS

ID: 288


Industry: Pulp & Paper
Application: SHM-Solids Handling Machinery

Customer Location: Paper mill in Wisconsin, U.S.A.
Application Date: 1999

Substrate: Steel
Products: * Belzona® 1311 (Ceramic R-Metal) ,
* Belzona® 1321 (Ceramic S-Metal) ,

Problem

The Andritz Screw Press is used to remove water and thicken the pulp stock. The screw shaft on this machine lost nearly half of its 7/8" wall thickness due to abrasion from the fiber as it is pressed against the screw.

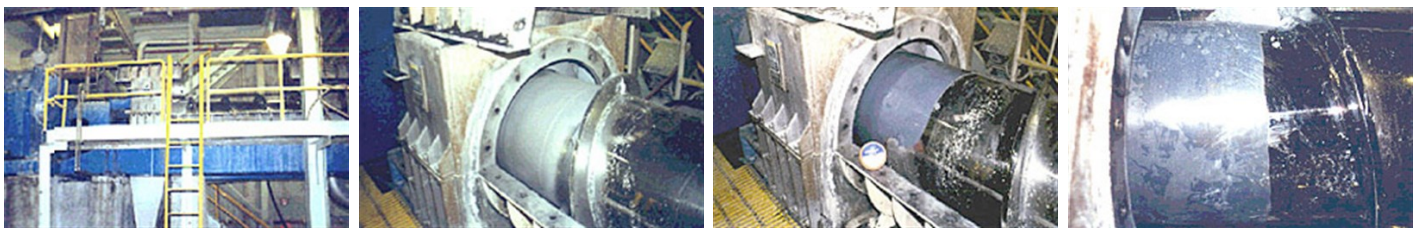

Photograph Descriptions

- * Overall view of the Andritz screw press ,
- * Surface preparation by grit blasting ,
- * Finished application ,
- * After 6 months of operation ,

Application Situation

Shaft wall thickness of an Andritz Screw Press.

Application Method

The application was carried out in accordance with Belzona Know-How System Leaflet SHM-14.

Belzona Facts

The shaft had previously been resurfaced by welding at a cost of \$12,000, but only lasted 18-months. The manufacturer recommends that the screw only be welded once and then replaced at a cost of \$80,000. After 6 months of service, over 75% of the top 0.040" layer of Belzona was still intact

For more examples of Belzona Know - How In Action, please visit <https://khia.belzona.com>

ISO 9001:2015
FS 695214
ISO 14001:2015
EMS 695213

Belzona products are
manufactured under an ISO
9000 Registered Quality
Management System.

www.belzona.com


BELZONA®
Repair • Protect • Improve