

BELZONA MAKES FOOTBRIDGE SAFE


ID: 464

Industry: General Industry
Application: FPA-Floor Problem Areas
Substrate: Concrete
Products: * Belzona® 5231 (SG Laminate) ,

Customer Location: Metropolitan Borough Council in UK
Application Date: January 2003

Problem

The enclosed footbridge suffered condensation which made the existing rubber floor covering very slippery.

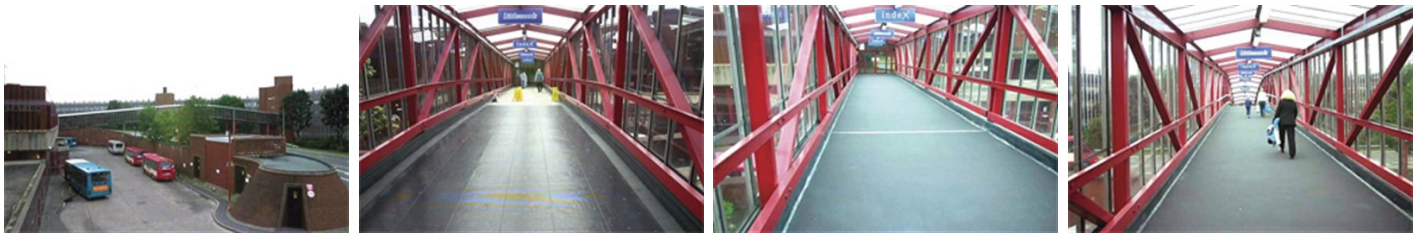

Photograph Descriptions

- * Outside view of the footbridge ,
- * Surface preparation in process ,
- * Belzona® 5231 applied ,
- * Application ready for traffic ,

Application Situation

Footbridge linking multi-story car park to shopping centre

Application Method

After removing existing rubber covering and old adhesive and cleaning the concrete, two coats of Belzona® 5231 were applied with additional Belzona® 9221 (Surefoot Aggregate) sprinkled onto top the coat to provide additional non-slip properties.

Belzona Facts

Application was completed in the three-day window in which closure of the footbridge was allowed. When examined recently, the coating is still providing a safe walking surface for pedestrian.

For more examples of Belzona Know - How In Action, please visit <https://khia.belzona.com>

ISO 9001:2015
FS 695214
ISO 14001:2015
EMS 695213

Belzona products are
manufactured under an ISO
9000 Registered Quality
Management System.

www.belzona.com


BELZONA®
Repair • Protect • Improve