

Hydro turbine repaired and protected with BELZONA


ID: 5159

Industry: Power
Application: CEP-Centrifugal Pumps
Substrate: Cast iron
Products: * Belzona 1311 (Ceramic R-Metal) ,
* Belzona 1341 (Supermetalglide) ,

Customer Location: Power plant, Ukraine
Application Date: January 2012

Problem

Erosion-corrosion and cavitation of the fan blades and of the face of the hydro turbine due to pressure

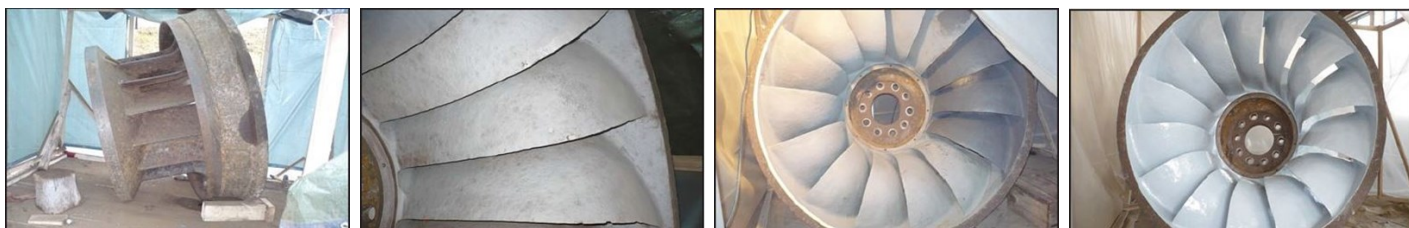

Photograph Descriptions

- * General view of the impeller Surface preparation ,
- * Grit blasting of the turbine ,
- * Geometry of fan blades repaired using Belzona 1311 ,
- * Repaired surfaces of the hydro turbine after the application of Belzona 1311 and Belzona 1341 ,

Application Situation

Erosion-corrosion problems revealed during annual inspection

Application Method

The application was carried out according to Belzona Know-How System Leaflets CEP-1 and FBC-2. Belzona 1311 was used to resurface the profile and Belzona 1341 was applied to improve efficiency and protect impeller from future erosion-corrosion

Belzona Facts

The customer avoided replacement costs by using Belzona to repair the turbine and at the same time, reduced downtime. Belzona will protect the equipment from future erosion-corrosion.

For more examples of Belzona Know - How In Action, please visit <https://khia.belzona.com>

ISO 9001:2015
FS 695214
ISO 14001:2015
EMS 695213

Belzona products are
manufactured under an ISO
9000 Registered Quality
Management System.

www.belzona.com


BELZONA[®]
Repair • Protect • Improve