

BELZONA REPAIRS BUCKET BOSS

ID: 5413


Industry: *Mining & Quarrying*
Application: *MPT-Mechanical Power Transmission*

Customer Location: *Dillwyn, VA, USA*
Application Date: *March 2014*

Substrate: *Steel*
Products: ** Belzona 1311 (Ceramic R-Metal) ,*
** Belzona 9411 (Release Agent) ,*

Problem

The bucket bosses were worn, causing the shaft to become loose and move. A loose fit causes faster wear and difficulties for the operator to be accurate.

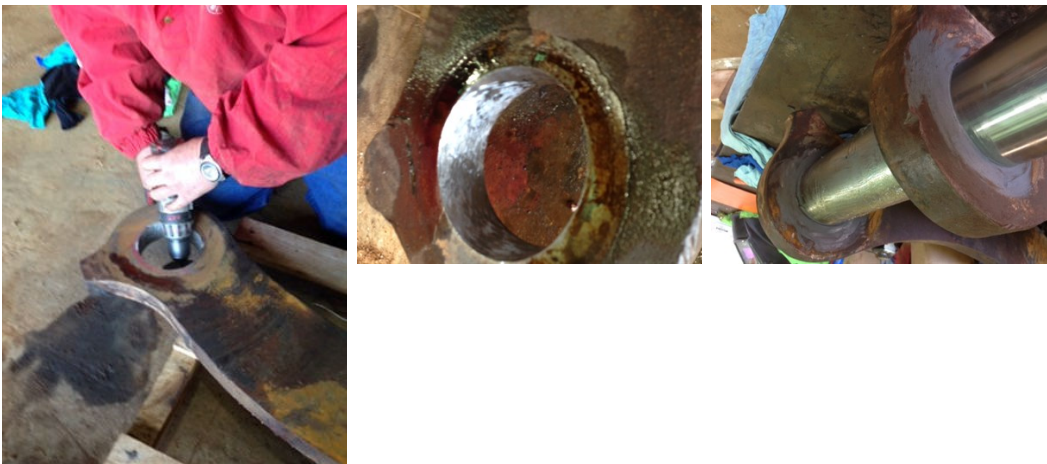

Photograph Descriptions

- * Surface preparation ,
- * Close-up view of the bucket boss surface preparation ,
- * Completed application ,

Application Situation

Worn bucket bosses on backhoe and front loaders.

Application Method

A grinder and suitable cleaner/degreaser were used to ground down and clean the bucket bosses. They were then aligned on the bench and tack welded. Then, Belzona 9411 was applied to the shaft. Belzona 1311 was mixed and applied on the inside of the hole as well as the shaft. The shaft was then placed through the holes, making sure it was all pushed into the gaps, and wiped off the excess, then allowed to cure. They did the same for several more applications. Even 6 months later, the bucket boss has been

For more examples of Belzona Know - How In Action, please visit <https://khia.belzona.com>

ISO 9001:2015
FS 695214
ISO 14001:2015
EMS 695213

Belzona products are
manufactured under an ISO
9000 Registered Quality
Management System.

www.belzona.com


BELZONA[®]
Repair • Protect • Improve

working very well.

Belzona Facts

The only other option was to replace the parts, which would cost \$2000 for each. With Belzona, time and money were saved.

For more examples of Belzona Know - How In Action, please visit <https://khia.belzona.com>

ISO 9001:2015
FS 695214
ISO 14001:2015
EMS 695213

Belzona products are
manufactured under an ISO
9000 Registered Quality
Management System.

www.belzona.com

