

BELZONA REPAIRS CONCRETE RAMP

ID: 5457

Industry: Buildings & Structures

Application: FPA-Floor Problem Areas

Substrate: Concrete


Products: * Belzona 4111 (Magma Quartz) ,

Customer Location: Bellingham, WA, USA

Application Date: September 2014

Problem

The foundation under the loading ramp had been undermined causing one concrete panel to crack which made a bump in the road for forklifts, which would then lose loads when hitting this joint.

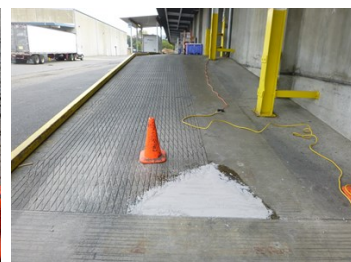

Photograph Descriptions

- * Area on forklift ramp for repair ,
- * Teflon spacer fit into joint to separate adjacent panels ,
- * Conditioner (seen around edge) and 4111 applied to repair area ,
- * The ramp repaired from a distance ,

Application Situation

Cracking on an important loading ramp

Application Method

The application was carried in accordance with Belzona Know-How System Leaflet FPA-1. The substrate was thoroughly cleaned and loose material removed. A Teflon spacer was placed into the joint to separate adjacent panels thus avoiding a repeat of cracking that had occurred. The Conditioner was brush applied and Belzona 4111 was hand applied.

Belzona Facts

The Customer had tried other materials with limited success and wanted a sure solution without a need to re-apply prematurely - hence Belzona was selected.

For more examples of Belzona Know - How In Action, please visit <https://khia.belzona.com>

ISO 9001:2015

FS 695214

ISO 14001:2015

EMS 695213

Belzona products are
manufactured under an ISO
9000 Registered Quality
Management System.

www.belzona.com


BELZONA[®]
Repair • Protect • Improve