

BELZONA 1593 LINING PROTECTION OF LIQUID-LIQUID HYDROCYCLONE


ID: 6391

Industry: Oil & Gas
Application: TCC-Tanks and Chemical Containment Areas
Substrate: Carbon Steel
Products: * Belzona 1593 ,

Customer Location: Oil & Gas Asset Owner, China
Application Date: July 2016

Problem

Newly fabricated liquid-liquid hydrocyclone to be protected against corrosion.

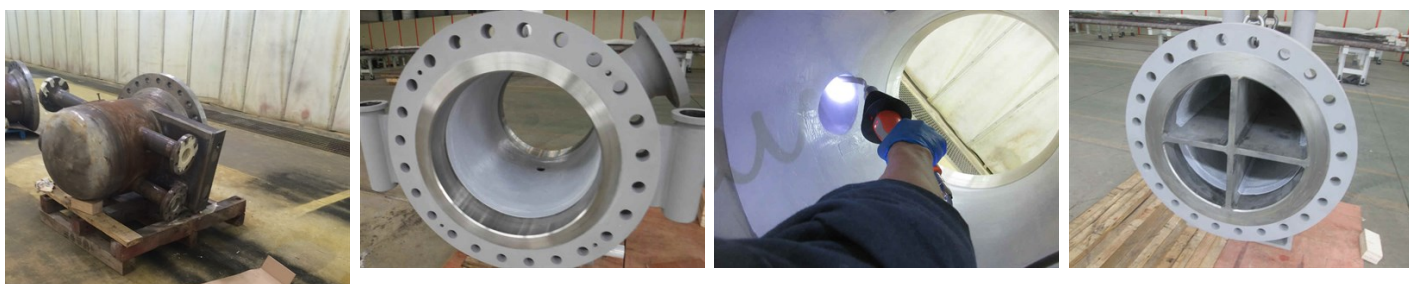

Photograph Descriptions

- * 1.Before Grit Blasting ,
- * 2.Application of the 2nd coat of Belzona1593 in light grey ,
- * 3.HVT Testing ,
- * 4.Completed Application ,

Application Situation

Two hydrocyclones MBM-0400/5 were specified to be protected with a Belzona fit-for-service lining. Operating parameters included design temperature 193C (380°F) and service was produced water.

Application Method

Application was carried out in accordance with Belzona Know-How System Leaflet TCC-5 for protecting steelwork. After grit blasting to achieve Sa2.5 (SSPC-SP10) , Belzona 1511 was used to smoothen the welding areas with poor finish and a two-coat system of Belzona 1593 was brush-applied to the vessel surface.

Belzona Facts

Using Belzona internal coating , the vessel will have a longer service life.

For more examples of Belzona Know - How In Action, please visit <https://khia.belzona.com>

ISO 9001:2015
Q 09335
ISO 14001:2015
EMS 509612

Belzona products are
manufactured under an ISO
9000 Registered Quality
Management System.

www.belzona.com


BELZONA[®]
Repair • Protect • Improve