

# FULL PROTECTION OF DEHYDRATOR WITH BELZONA LINING AND NOZZLE INSERTS


ID: 6449

Industry: Oil & Gas  
Application: TCC-Tanks and Chemical Containment Areas  
Substrate: Carbon Steel  
Products: \* Belzona 1391T ,

Customer Location: Oil & Gas Asset Owner, China  
Application Date: December 2016

## Problem

Newly fabricated vessel which was required to have an internal protective coating.

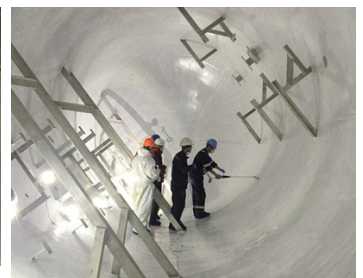

## Photograph Descriptions

- \* 1. Grit blasting to Near White Metal cleanliness levels ,
- \* 2. Placing the nozzle inserts ,
- \* 3. Application of the second coat ,
- \* 4. Inspecting for holidays or discontinuities via spark testing ,

## Application Situation

This dehydrator needed full internal protection, which included a Belzona fit-for-service lining and Belzona inserts for small bore nozzles. The vessel was designed for operating temperature levels of 20C (68F) minimum, 58 C (136 F) normal, and 70 C (158 F) maximum. The chemical service was crude oil, water and sour gas.

## Application Method

Application was carried out in accordance with Belzona Know-How System Leaflet TCC-5 and TCC-16b . Pre-formed nozzle inserts were fabricated and bonded into small bore nozzles to ensure continuity of protection.

For more examples of Belzona Know - How In Action, please visit <https://khia.belzona.com>

ISO 9001:2015  
FS 695214  
ISO 14001:2015  
EMS 695213

Belzona products are  
manufactured under an ISO  
9000 Registered Quality  
Management System.

[www.belzona.com](http://www.belzona.com)

  
**BELZONA**<sup>®</sup>  
Repair • Protect • Improve

## Belzona Facts

Using the Belzona internal coating and nozzle inserts solution, the vessel will have a longer service life.

---

For more examples of Belzona Know - How In Action, please visit <https://khia.belzona.com>

ISO 9001:2015

FS 695214

ISO 14001:2015

EMS 695213

Belzona products are  
manufactured under an ISO  
9000 Registered Quality  
Management System.

[www.belzona.com](http://www.belzona.com)

