

# BELZONA 5871 PROTECTS STEAM PIPING HAZARDOUS TO OPERATORS



ID: 8288

Industry: Pulp & Paper  
Application: VPF-Valves, Pipes and Fittings  
Substrate: Steel  
Products: \* Belzona 5871 ,

Customer Location: Alabama, USA  
Application Date: May, 2020

## Problem

*These piping sections were a potential hazard for contact burn injuries since they are located at ground level.*

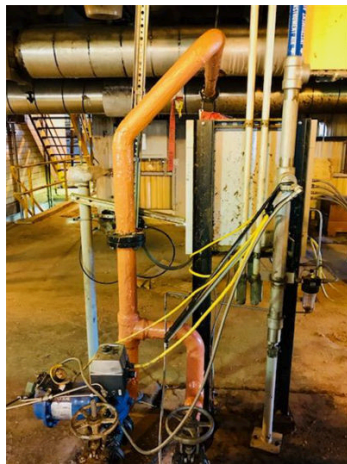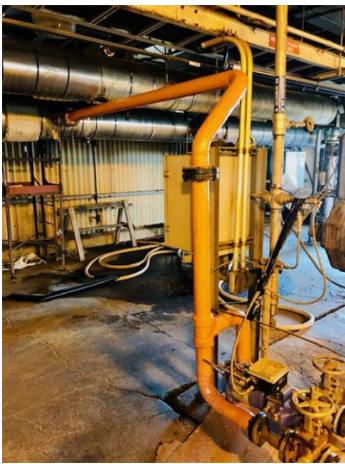

## Photograph Descriptions

- \* Pipe coated with Belzona 5871 ,
- \* Pipe coated with Belzona 5871 ,
- \* Measuring temperature after application of Belzona 5871 ,
- \* Measuring temperature after application of Belzona 5871 ,

## Application Situation

Steam piping of four identical sections of a batch digester at a local paper mill, operating at 200°F max.

## Application Method

The line was shut down for safety handling during application procedure. Belzona 5871 was applied in 4 coats in one day, with a total DFT of 160-180 mils.

## Belzona Facts

The curing time of Belzona 5871 was accelerated because the pipe was still warm during application. All 4 layers of Belzona 5871

For more examples of Belzona Know - How In Action, please visit <https://khia.belzona.com>

ISO 9001:2015  
FS 695214  
ISO 14001:2015  
EMS 695213

Belzona products are  
manufactured under an ISO  
9000 Registered Quality  
Management System.

[www.belzona.com](http://www.belzona.com)

  
**BELZONA®**  
Repair • Protect • Improve

were applied in one day, and 4 more identical pipe sections were repaired during a planned maintenance. Belzona was able to reduce the temperature down to 110F, preventing any type of contact surface burn and protecting the pipe against future corrosion degradation.

For more examples of Belzona Know - How In Action, please visit <https://khia.belzona.com>

ISO 9001:2015	Belzona products are
FS 695214	manufactured under an ISO
ISO 14001:2015	9000 Registered Quality
EMS 695213	Management System.

[www.belzona.com](http://www.belzona.com)

