

BELZONA SUPERWRAP II UPDATES RISER

CUSTOMER

Gulf of Mexico, USA

APPLICATION DATE

September 2015

APPLICATION SITUATION

4" and 6" risers on offshore production platform.

PROBLEM

External corrosion was creating thin wall defective areas with potential loss of structural integrity. The asset owner wanted to restore the integrity of the pipe wall by employing a compliant repair solution without downtime and loss of production.

PRODUCTS

Belzona 1982 (SuperWrap II)

Belzona 9381 (Reinforcement Sheet)

Belzona 9382 (Release Film)

Belzona 1121 (Super XL-Metal)

Belzona 9111 (Cleaner Degreaser)

SUBSTRATE

Carbon Steel

APPLICATION METHOD


The repair area was abrasive blasted to achieve SSPC-SP 10 (Near White Metal) with an anchor profile of at least 3 mils. The surface was wiped clean with Belzona 9111 and maintained clean until commencement of the application. Belzona 1121 was used as a rebuilding material to fill pits and restore the original thickness of the wall. Belzona 9381 was saturated with Belzona 1982 and applied around the riser in 5 wraps (10 layers) in compliance with the engineered design. Then, Belzona 9382 was installed to consolidate the repair during the curing process. Once the system was cured, Belzona 9382 was released.

BELZONA FACTS

This composite repair solution met the asset owner's expectations as it was carried out and completed without loss of production.

PICTURES

1. Condition of riser before abrasive blast.
2. Riser during blast showing defect areas.
3. Rebuilding the substrate with Belzona 1121.
4. Completed application of Belzona SuperWrap II.

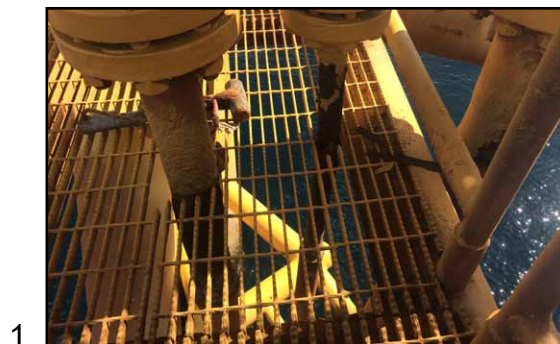

For more examples of *Belzona Know-How In Action*, please visit <http://khia.belzona.com>



Belzona products are manufactured under an ISO 9000 Registered Quality Management System.

UK • USA • Canada • Thailand
www.belzona.com


BELZONA
Repair • Protect • Improve