

BELZONA 1381: ONE COAT PIPE LINING



ID: 5590

Industry: Oil & Gas
Application: VPF-Valves, Pipes and Fittings
Substrate: Carbon Steel
Products: * Belzona 1381 ,

Customer Location: Engineering company, Italy
Application Date: November, 2014

Problem

The pipeline is used as a monolithic dielectric joint. The pipeline's diameter varied between 8 and 24 inches and individual lengths up to 10m. The carbon steel substrate required protection against chemical and abrasive attack at elevated temperatures.

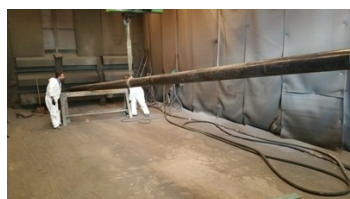

Photograph Descriptions

- * Outer view of pipe. ,
- * Spin blast in action. ,
- * Completed application, inside view. ,
- * Completed application, outer view. ,

Application Situation

One of the global leaders in the Engineering & Construction and Drilling businesses with a strong bias towards Oil and Gas related activities required internal protection of a pipeline.

Application Method

The application was carried out in accordance with Belzona Know-How System Leaflet VPF-2 using spin spray application equipment.

Belzona Facts

The coating was applied in a single layer 1200-1400 microns thick without sagging, thus avoiding the cost of a second coat application. In addition, Belzona 1381 facilitates savings in raw materials, as carbon steel can be used in place of special metal alloy.

For more examples of Belzona Know - How In Action, please visit <https://khia.belzona.com>

ISO 9001:2015
FS 695214
ISO 14001:2015
EMS 695213

Belzona products are
manufactured under an ISO
9000 Registered Quality
Management System.

www.belzona.com


BELZONA[®]
Repair • Protect • Improve