

# SPALLED CONCRETE IN A HIGH TRAFFIC AREA RECOVERED AND PROTECTED BY BELZONA


ID: 7714

Industry: *Pulp & Paper*  
 Application: *FPA-Floor Problem Areas*  
 Substrate: *Concrete*  
 Products: *\* Belzona 5231 (SG Laminate) ,*  
*\* Belzona 5233 ,*

Customer Location: *Oregon, USA*  
 Application Date: *November 2017*

## Problem

*Fresh concrete section that was poured developed severe spalling and pits. The customer was concerned that this would open up this section for water to penetrate the pad and through the winter the water would freeze and cause even worse damage. The customer required a material that would not be smooth and slippery, and they wanted it to "look like concrete".*

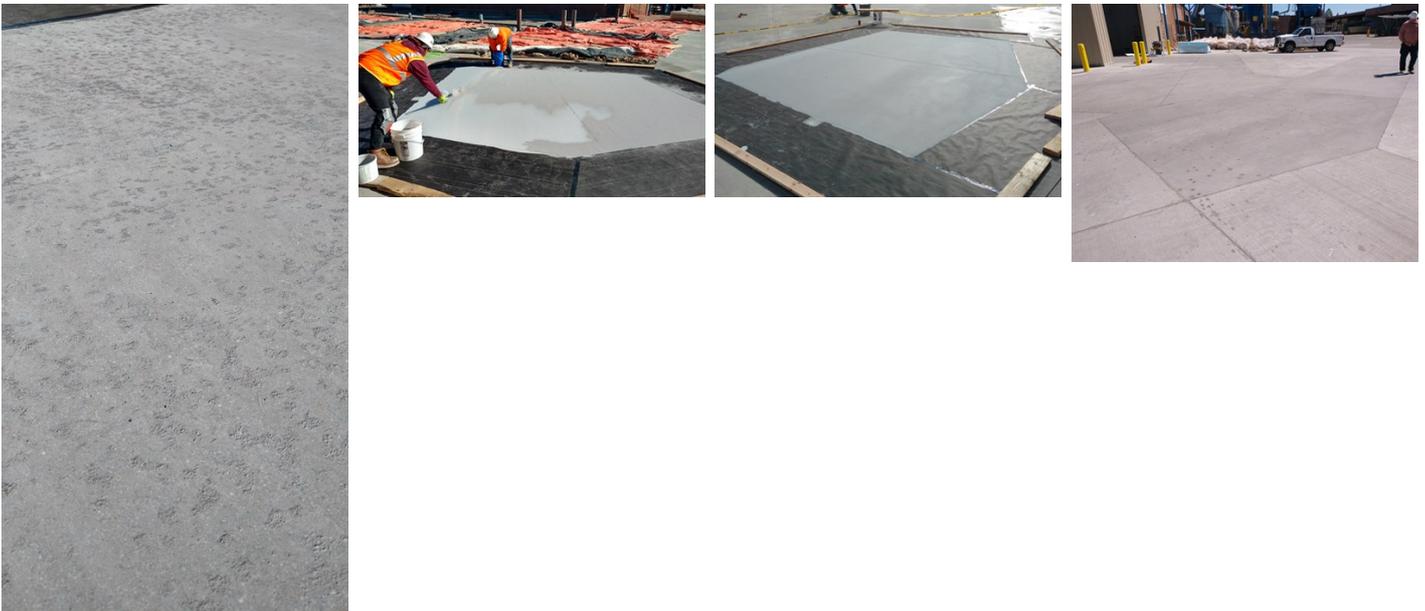

## Photograph Descriptions

- \* 1. Original condition showing the spalling and pitting. ,
- \* 2. Belzona 5231 applied, the aggregate being spread. ,
- \* 3. Belzona 5231/5233 application complete. ,
- \* 4. The application after 6 months. ,

## Application Situation

Concrete area in a wood production plant where 75,000 lb forklifts carrying large units of wood travel over it. It is also in the middle of where semi-trucks pass through the yard. This is located in Eastern Oregon, so there are also snow plows that pass over this

For more examples of Belzona Know - How In Action, please visit <https://khia.belzona.com>

ISO 9001:2015  
 FS 695214  
 ISO 14001:2015  
 EMS 695213

Belzona products are  
 manufactured under an ISO  
 9000 Registered Quality  
 Management System.

[www.belzona.com](http://www.belzona.com)

  
**BELZONA**  
 Repair • Protect • Improve

application.

## Application Method

We waited for the fresh concrete to fully cure. Surface prep was done with hand grinders to remove all of the surface laitence and loose material from the spalling. There were still some areas of deeper pitting that we addressed by "flooding" on the first layer. The first layer, Belzona 5231 in light gray color, was applied using a squeegee to spread it around, and smoothed over using a roller. Then a light gray quartz aggregate spread by hand to refusal. We allowed that to cure for a couple hours, and then we were able to vacuum the excess aggregate off the top and apply the second layer, Belzona 5233 Clear with rollers and allowed to fully cure.

## Belzona Facts

Due to the weight that travels across this, the concrete pads are 16" thick and replacement was the only other option, which was cost-prohibitive. This repair was only a few hundred U.S. dollars and was available for use in only a few days versus an additional 4-6 weeks for new concrete to cure. After inspection 6 months later, after a full winter season, the application looked just as it had looked when it was applied. No scratches, scrapes, chips, or damage of any kind could be found.

---

For more examples of Belzona Know - How In Action, please visit <https://khia.belzona.com>

ISO 9001:2015

FS 695214

ISO 14001:2015

EMS 695213

Belzona products are  
manufactured under an ISO  
9000 Registered Quality  
Management System.

[www.belzona.com](http://www.belzona.com)

